

### Three-terminal positive voltage regulator

#### FEATURES

Maximum output current IOM: 0.1A

Output voltage VO: 9V

Continuous total dissipation


PD: 0.6 W ( T<sub>a</sub> = 25 °C )

#### MECHANICAL DATA

- Case: SOT-89 Small Outline Plastic Package

- Polarity: Color band denotes cathode end

- Mounting Position: Any

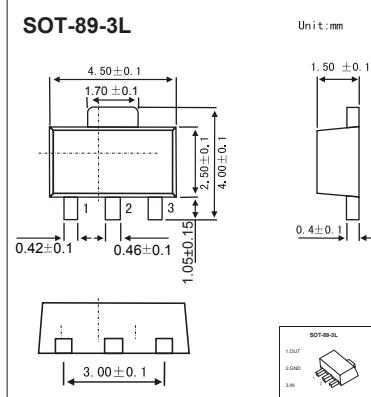

#### ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V <sub>i</sub>	30	V
Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	166.7	°C/W
Operating Junction Temperature Range	T <sub>OPR</sub>	-25~+125	°C
Storage Temperature Range	T <sub>STG</sub>	-65~+150	°C


#### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

(V<sub>i</sub>=16V, I<sub>o</sub>=40mA, C<sub>i</sub>=0.33μF, C<sub>o</sub>=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	V <sub>o</sub>		25°C	8.64	9.0	9.36	V
		12V ≤ V <sub>i</sub> ≤ 24V, I <sub>o</sub> =1mA-40mA	0-125°C	8.55	9.0	9.45	V
		I <sub>o</sub> =1mA-70mA		8.55	9.0	9.45	V
Load Regulation	△V <sub>o</sub>	I <sub>o</sub> =1mA-100mA	25°C		19	mV	
		I <sub>o</sub> =1mA-40mA	25°C		11	mV	
Line regulation	△V <sub>o</sub>	12V ≤ V <sub>i</sub> ≤ 24V	25°C		45	mV	
		13V ≤ V <sub>i</sub> ≤ 24V	25°C		40	mV	
Quiescent Current	I <sub>q</sub>		25°C		4.1	mA	
Quiescent Current Change	△I <sub>q</sub>	13V ≤ V <sub>i</sub> ≤ 24V	0-125°C		1.5	mA	
	△I <sub>q</sub>	1mA ≤ I <sub>o</sub> ≤ 40mA	0-125°C		0.1	mA	
Output Noise Voltage	V <sub>N</sub>	10Hz ≤ f ≤ 100KHz	25°C	58		μV/V <sub>o</sub>	
Ripple Rejection	RR	15V ≤ V <sub>i</sub> ≤ 25V, f=120Hz	0-125°C		45	dB	
Dropout Voltage	V <sub>d</sub>		25°C		1.7	V	

\* Pulse test.

#### TYPICAL APPLICATION

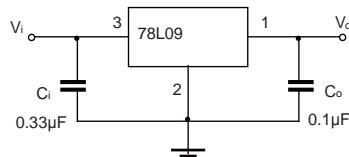

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# RATINGS AND CHARACTERISTIC CURVES

## ■ Typical Characteristics

